

**eFS15 Series – Isolated AC/DC Converters**
85 – 264Vac Input, Maximum Power: 15WData Sheet
April 05, 2024**eFS15 Series –small size isolated AC/DC converters****Features**

- Encapsulated, compact case
- High Efficiency
- Low input current at no load
(0.2W@220VAC)
- Universal input range
- Built in EMI Filter
- Inrush current limit
- Over current protection
- Over voltage protection
- Output short circuit protection
- Input – Output Isolated
- RoHS directive

**Applications**

- Telecommunication
- Datacom
- Instrumentation
- Distributed Power System

Description

eFS15 Series is a High Efficiency AC/DC Converter that provides up to 15 watts of output power in ultra compact size. This module operate a burst mode below a given output power and it offers a high efficiency at light load. This module has an over current and over voltage protection mode and wide operating temperature range from -30°C to +60°C.

**eFS15 Series – Isolated AC/DC Converters**
85 – 264Vac Input, Maximum Power: 15WData Sheet
April 05, 2024

Absolute Maximum Ratings

Parameter	Min	Typ	Max	Unit	Notes
Input Voltage Continuous	85	-	264	VAC	
Operating Ambient Temperature	-30	-	60	°C	
Storage Temperature	-40	-	70	°C	
I/O Isolation Voltage	-	-	3000	VAC	

Stresses in excess of the absolute maximum ratings can cause permanent damage to the device

Electrical Specifications

Input Characteristics

T_A = +25°C, V_{in} = 85 ~ 264VAC After warm up unless otherwise specified

Parameter	Symbol	Min	Typ	Max	Unit
Operating voltage Range		85		264	Vac
Input current (@ 220V / @110V)	I _{in}				A
eFS15-3R3			0.13(0.21)		
eFS15-5			0.13(0.20)		
eFS15-12			0.18(0.30)		
eFS15-15			0.17(0.28)		
eFS15-24			0.18(0.29)		
eFS15-1212			0.18(0.30)		
eFS15-1515			0.17(0.28)		
No load Input Power					W
eFS15-3R3			0.2		
eFS15-5			0.2		
eFS15-12			0.2		
eFS15-15			0.2		
eFS15-24			0.2		
eFS15-1212			0.2		
eFS15-1515			0.2		
Inrush Current@Cold start				30A max 60A max	@110VAC @220VAC
Operating Frequency		47		63	Hz

**eFS15 Series – Isolated AC/DC Converters**
85 – 264Vac Input, Maximum Power: 15WData Sheet
April 05, 2024**Output Characteristics**T_A = +25°C, V_{in} = 85 ~ 264VAC After warm up unless otherwise specified

Parameter	Symbol	Min	Typ	Max	Unit
Output Voltage tolerance	V _o	-	-	±2	%
Output Current	I _o				
eFS15-3R3				3	A
eFS15-5				3	A
eFS15-12				1.3	A
eFS15-15				1.0	A
eFS15-24				0.65	A
eFD15-1212				±0.65	A
eFD15-1515				±0.5	A
Output Regulation;					
- Line Regulation		-	-	±1	%
(From minimum input voltage to maximum input voltage, constant load)					
- Load Regulation		-	-	±1	%
(From no load to maximum load, Constant load)					
Output Current Limit (Automatic recovery)		>105			%
Output Ripple and noise (V _{in} = 220Vac, and I _o = Max Output Current Bandwidth 20MHz, 1uF Ceramic cap)	mVp-p	-	1% of V _{out}		mV
Efficiency					
eFS15-3R3			75		%
eFS15-5			77		%
eFS15-12			79		%
eFS15-15			81		%
eFS15-24			81		%
eFD15-1212			78		%

**eFS15 Series – Isolated AC/DC Converters**
85 – 264Vac Input, Maximum Power: 15WData Sheet
April 05, 2024

eFD15-1515 (100% of max Io, Vin = 220VAC)			80		%
Dynamic Load Response (1uF Ceramic 25% to 50 %, 50% to 25%, Slew rate = 0.1A/us)			±	3% of Output Voltage	mV
Start – Up Time		-	-	400	ms
Hold – Up Time				10	ms
Turn – on overshoot		-	-	1	%
Maximum output capacitance					μF

Isolation Specifications

Parameter	Symbol	Min	Typ	Max	Unit
I/O Isolation Voltage (AC500V, 1 Min)					
- Input-Output:			-	3000	VAC
- Input-Case:			-	3000	VAC
- Output-case:			-	1500	VAC
Isolation Resistance	RISO				
- Output-Case (at DC500V at 25°C And 70%RH for 1 min)		>100	-	-	MΩ
Isolation Capacitance	CISO				pF

General Specifications

Parameter	Symbol	Min	Typ	Max	Unit
Switching Frequency				100	KHz
MTBF (MiL-HDBK- 217F)		6.6 x 10 ⁵			hrs
Dimensions (W.H.L)		70 x 45 x 19.5			mm
Weight			100		Grams



eFS15 Series – Isolated AC/DC Converters

85 – 264Vac Input, Maximum Power: 15W

Data Sheet
April 05, 2024

Environmental

Parameter	Symbol	Min	Typ	Max	Unit
Operating Temperature		-30		60	°C
Operating Humidity (RH non-condensing)		5		95	%
Storage Temperature		-40		70	°C
Vibration @10G(98m/s ²)		10	Vin=220VAC, Vo=5V@1.3A , At 25°		

Characteristic Curves

Output Ripple & Noise

eFS15-3R3




Vin=220VAC, Vo=3.3V@3A , At 25°

eFS15-5




Vin=220VAC, Vo=5V@3A , At 25°

eFS15-12

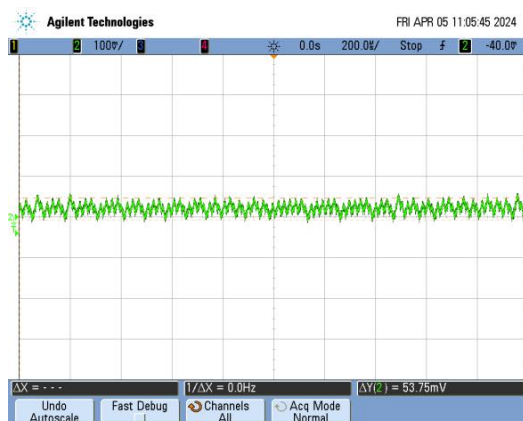

eFS15-15

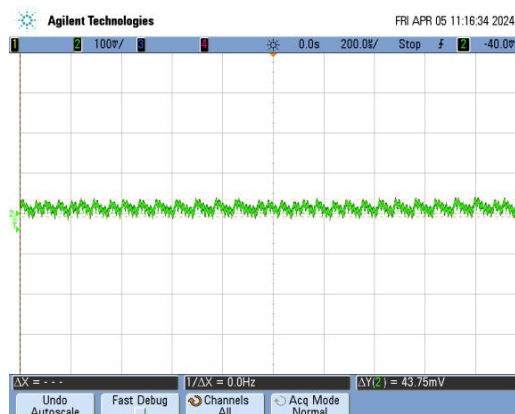

Vin=220VAC, Vo=15V@1.0A , At 25°



eFS15 Series – Isolated AC/DC Converters

85 – 264Vac Input, Maximum Power: 15W


Data Sheet
April 05, 2024

Output Ripple & Noise


eFS15-24



Vin=220VAC, Vo=24V@0.65A, At 25°

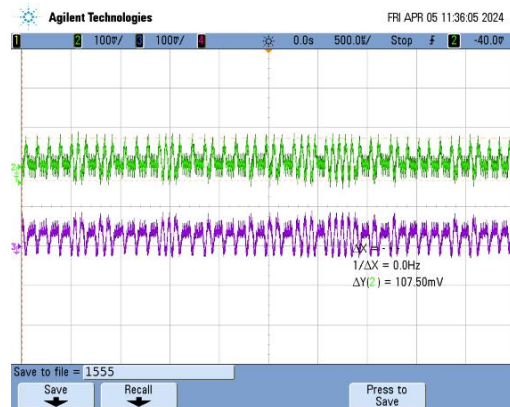

eFD15-1212

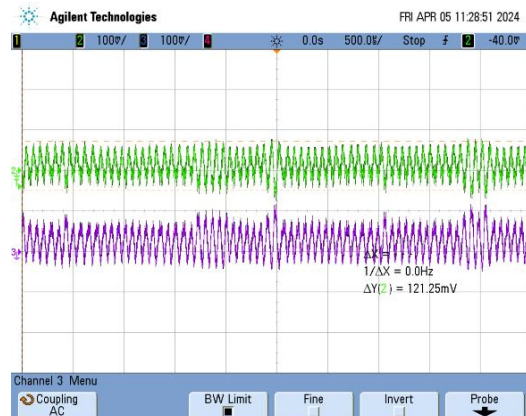

Vin=220VAC, Vo=±12V@0.65A, At 25°C

Vin=220VAC, Vo=±15V@0.5A, At 25°C




eFS15 Series – Isolated AC/DC Converters


85 – 264Vac Input, Maximum Power: 15W

Data Sheet
April 05, 2024


Efficiency Curve

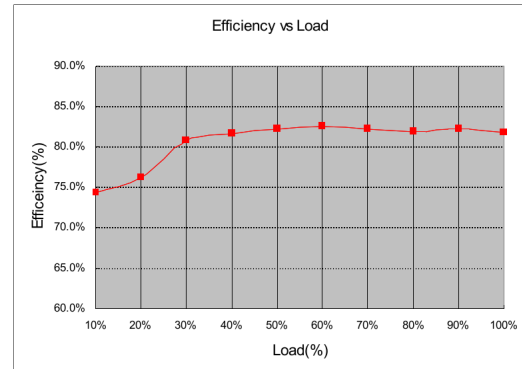


eFS15-3R3

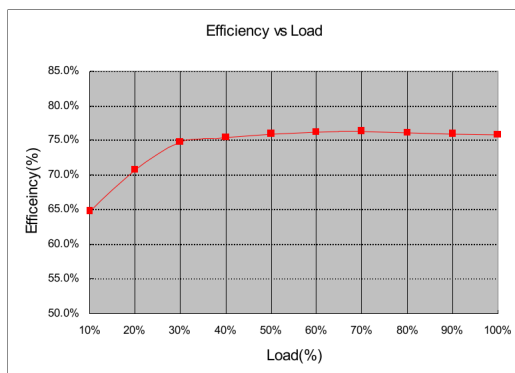

eFS15-5

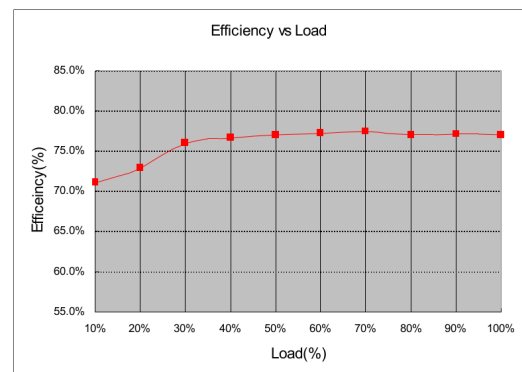

eFS15-12

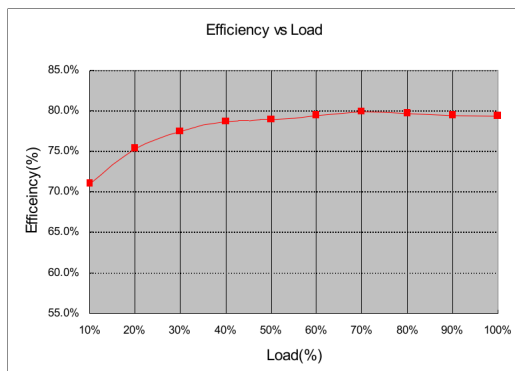

eFS15-15


eFS15-24



eFS15 Series – Isolated AC/DC Converters


85 – 264Vac Input, Maximum Power: 15W

Data Sheet
April 05, 2024

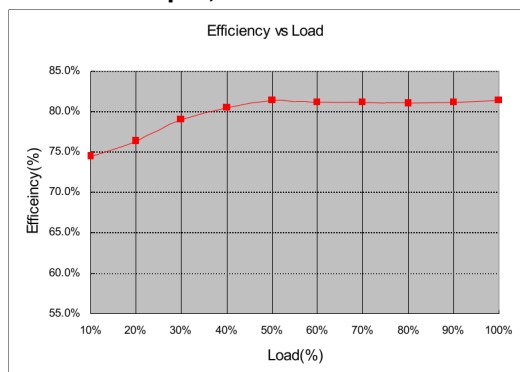


Efficiency Curve

eFD15-1212

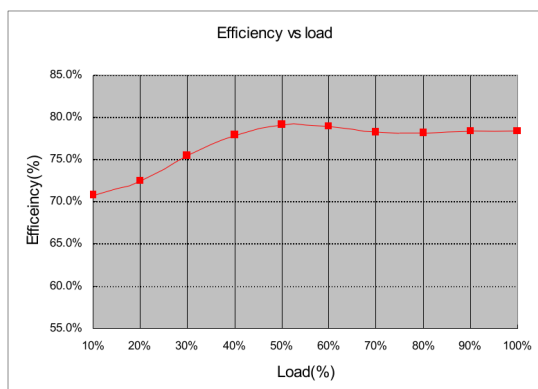

eFD15-1515

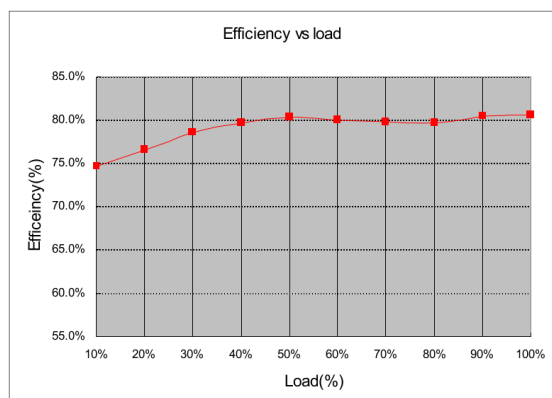




eFS15 Series – Isolated AC/DC Converters

85 – 264Vac Input, Maximum Power: 15W


Data Sheet
April 05, 2024

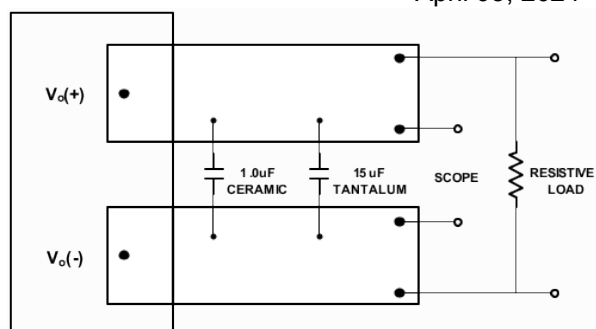

* Conductor from Vout-pins to capacitors = 50mm (1.97in)


Parallel operation

Parallel operation is available by connecting the units as shown below.

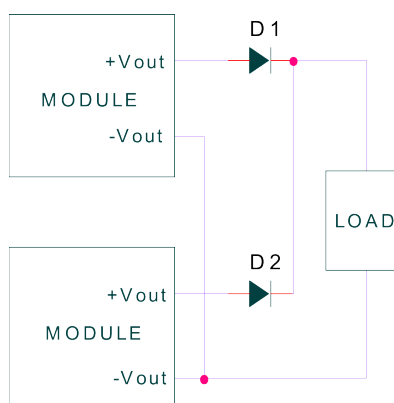

Instruction manual

Basic connection

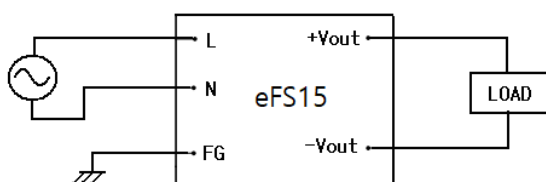

Output ripple and noise Test


Series operation

Series operation is available by connecting the outputs of two or more power supplies, as shown below. Output current in series connection should be lower than the lowest current in each unit. (Please use schottky barrier diode)

eFS15 Series – Isolated AC/DC Converters

85 – 264Vac Input, Maximum Power: 15W

Data Sheet
April 05, 2024

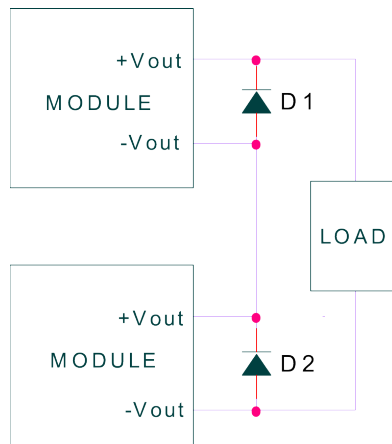

In order to comply with safety requirements, eFS15 series has a fuse built in.

Input Output Filter


eFS15 series have an internal EMI filter. To reduce conducted noise, additional external input filter is required

To reduce a output ripple and noise, external capacitor is required at the output of the device

Thermal Considerations

eFS10 series has wide operating temperature range from -30°C to $+60^{\circ}\text{C}$.

However, it should be required a enough air flow for more reliable operation. Output derating curve provide designers with a quantity of a current under the desired ambient temperature and velocity of a airflow.

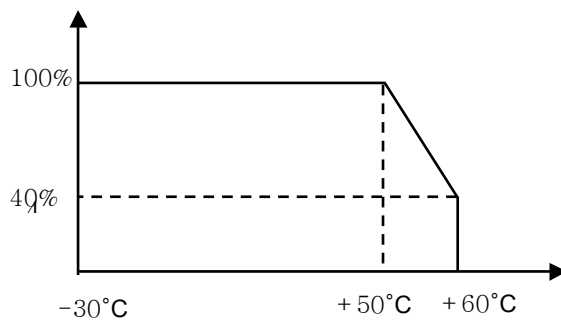

Over current Protection (OCP)

eFS15 series built in over current protection circuit which operates when the output current is over 105% of rating and automatically recovers when over current condition is removed

If the short or overload condition continues, the power module could be damaged.

Over Voltage Protection (OVP)

eFS15 series built in overvoltage protection circuit. When the OVP trigger, the output will be shut down. The output automatically recovers when over voltage condition is removed.

Feature Description

Input Fuse

Soldering Information

The product is intended for through hole mounting in a PCB, When wave soldering is used, the temperature on the pins is specified to



eFS15 Series – Isolated AC/DC Converters

85 – 264Vac Input, Maximum Power: 15W

Data Sheet
April 05, 2024


maximum 260°C for maximum 10 seconds

when hand soldering, care should be taken to

avoid direct contact between the hot soldering iron tip and the pins for more than a few seconds in order to prevent overheating.

EMI Characteristic (conducted Emission)

In order to reduce conducted noise install an external input filter as shown in below.

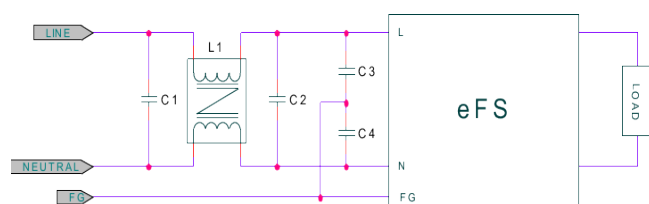


Model Number	L1	C1	C2	C3,C4
eFS15-12	10mH	330nF	100nF	x

Complies with CISPR 22 CLASS B

Pin assignments

TOP VIEW

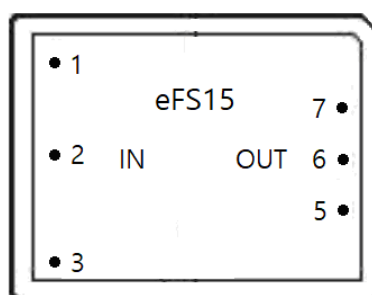

**eFS15 Series – Isolated AC/DC Converters**
85 – 264Vac Input, Maximum Power: 15WData Sheet
April 05, 2024**Single Output**




PIN NO	NAME	FUNCTION
1	FG	Frame Ground
2	AC(L)	AC Input
3	AC(N)	AC Input
4	No pin	No connection
5	+Vout	Positive side of output voltage
6	No pin	
7	GND	
8	No pin	

Dual Output

PIN NO	NAME	FUNCTION
1	FG	Frame Ground
2	AC(L)	AC Input
3	AC(N)	AC Input
4	No pin	
5	Output1	Positive side of output voltage
6	COM	Common ground
7	Output2	Negative side of output voltage
8	No pin	

Mechanical Specification


TOP VIEW

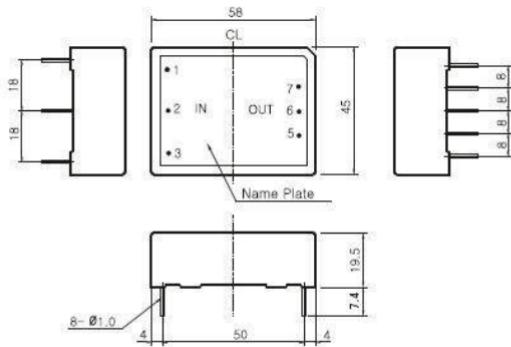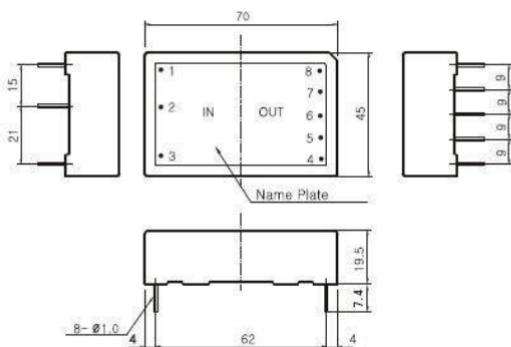**eFS15 Series – Isolated AC/DC Converters**
85 – 264Vac Input, Maximum Power: 15WData Sheet
April 05, 2024**► Triple Output**

※ Mounting hole top view

NOTES

1. All dimensions are mm.
2. Weight : 90g or less (single, dual)
100g or less (triple)



※ Mounting hole top view

Ordering Information

Input	Output1, Output2	Maximum Power	Ripple & Noise Typ.	Efficiency	Model	Output Voltage
				15W@1.0A	15W	150mVp-p
85 – 264V	3.3V@3A	9.9W	80mVp-p	24V@0.65A	N15.6	240mVp-p
	5V@3A	15W	80mVp-p	+12V@0.65A, -12V@0.65A	eFS15-3R3(C)	120mVp-p
	12V@1.3A	15.6W	120mVp-p	79%	eFS15-5(C)	
					eFS15-12(C)	

	+15V@0.5A, -15V@0.5A	15W	150mVp-p	80%	eFD15-1515(C)
--	-------------------------	-----	----------	-----	---------------

* (C): Chassis mount type

Part number structure**eFS15– 5(C)**

**eFS15 Series – Isolated AC/DC Converters**
85 – 264Vac Input, Maximum Power: 15WData Sheet
April 05, 2024

Model name _____

S: single ☐
D: dual ☐

Maximum output power _____ Chassis mount type _____

_____ Output Voltage

No part of this publication may be copied, transmitted, or stored in a retrieval system or reproduced in any way including, but not limited to, photography, photocopy, or Other recording means, without prior written permission from Powerplaza co.,Ltd

**HEAD OFFICE & FACTORY**

#1401, 14F/L 6th Daeryung TechnoTown 493-6,
Gasam-Dong, Kumchon-Gu, Seoul, 153-803,
Korea
TEL: +82 2 855 4955 | FAX: +82 2 855 4954

GENERAL SALES INQUIRIES

Please feel free to
contact : sales@powerplaza.co.kr

©2011 Powerplaza co.,Ltd. Specification subject to change without notice